TECHNICAL BULLETIN

Published October 19, 2026

EcoStar Gap Tool

EcoStar field and starter row tiles require a minimum 3/8” gap between all tiles, roof protrusions, and/or dormer walls. EcoStar offers a gap tool that can assist with maintaining a minimum 3/8” gap to allow for proper expansion and contraction of EcoStar materials. The gap tool is manufactured to dimensions of 6” x 3/8” x 1” (*152.4mm x 9.525mm x 25.4mm*).

If there are any questions, please contact the Technical Department at 800-211-7170 x336.

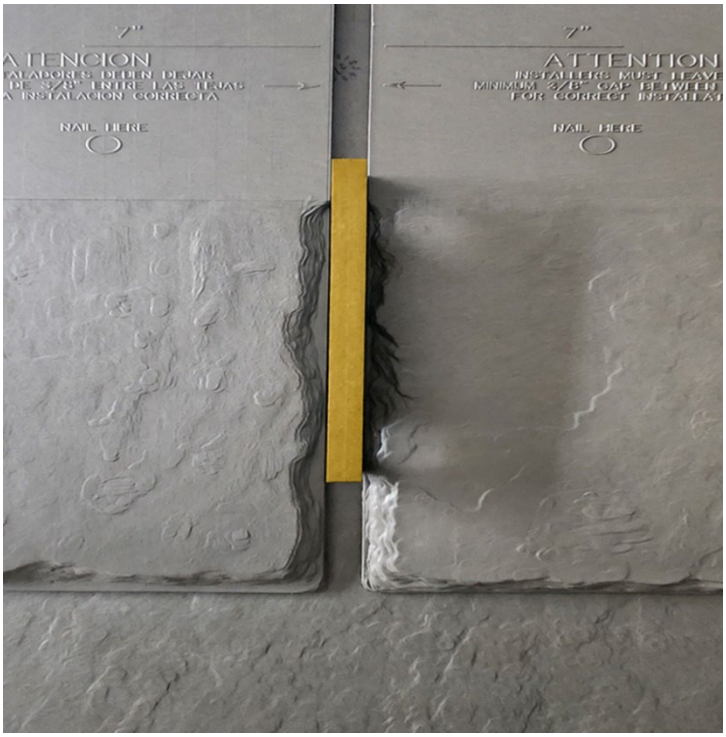

EcoStar tiles require a minimum 3/8” gap between all tiles, roof protrusions, and/or dormer walls. If a multi-width tile profile is used, the contractor can widen the gap between tiles as needed for optimal tile placement, as long as the maximum allowable tile gap of 1/2” is not exceeded.

If any gap adjustments are made, please ensure all fasteners are covered while maintaining a minimum 2” lateral overlap of the proceeding tile course.

Scan for Installation Instructions:

EcoStar LLC | 42 Edgewood Dr, Holland, NY 14080 | 800-211-7170 | www.ecostarllc.com | technical@ecostarllc.com