




Polymeric Slate Tile Roof System

DESCRIPTION

Majestic Slate™ is a rubber and plastic-based Class C roof tile designed to provide the look of natural stone slate. Majestic Slate is manufactured with a state of the art formulation using recycled polyolefin polymers.

Majestic Slate comes in 10" (254 mm) and 12" (305 mm) widths, is 18" (457 mm) long and ¼" (6mm) thick, and is available in eleven (11) colors and the five (5) designs shown below.

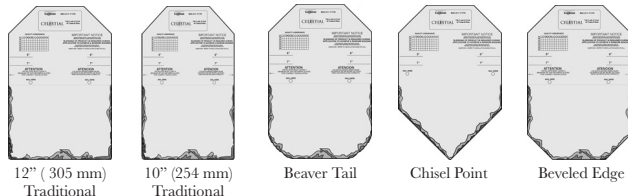

ADVANTAGES

Majestic Slate provides the look of natural slate with these added advantages:

- High impact resistance that provides protection from hail, falling branches, foot traffic, ice and snow damage.
- Majestic Slate can be installed up to eight times faster than natural stone slate.
- The color in Majestic Slate has been added during formulation providing for color throughout the product. As with all roofing products, natural weathering will occur.
- EcoStar provides warranties for Majestic Slate for up to 50 years*

INSTALLATION

Temperature – If tiles have been stored in temperatures below 45°F (7°C), they must be restored to a temperature above 45°F (7°C) before installation. Ambient temperature should be at least 34°F (1°C) and rising.

Substrate – Majestic Slate should only be installed on a minimum of ½" (13 mm) plywood, minimum 7/16" (11 mm) OSB or minimum ¾" (19 mm) tongue and groove wood decking. Majestic Slate should not be applied over existing roof materials. Existing roof materials must be removed down to the deck, prior to installation.

Slope – Majestic Slate is not recommended for slopes less than 3/12 (14°). If this is desired, contact the technical department for review. On roof slopes less than 6/12 (27°), the tiles must be installed with a maximum 6" (152 mm) exposure. On roof slopes of 6/12 (27°) or greater, the tiles may be installed with a 6" (152 mm), 6½" (165 mm) or 7" (178 mm) exposure.

Chisel Point tiles may only be installed with a 6" (152 mm) exposure.

Underlayment – Prior to installation, **Glacier Guard™** underlayment should be applied to all rakes, valleys, ridges, hips, eaves and any protrusions. **Aqua Guard™** is then applied over the remaining deck surface.

Fasteners – Fasteners must be ring shank stainless steel. **EcoStar Fasteners** are available in either hand drive style or pneumatic coil.

Color Variation – All Majestic Slate tiles come with shade variation. This shade variation may occur differently from pallet to pallet. Application of the product should not begin until all material has been delivered to the project site. Because of this shade variation the applicator must take precautions to ensure that the various shades of the product are properly blended. Tiles must be taken from different pallets and bundles to ensure consistency in application. **NOTE: EcoStar will not be responsible for the improper blending and application of the product. Contact EcoStar Customer Service for available factory-blended options.**

Natural weathering will produce further shade variations, even in tiles appearing to be identical in color when new.

Ventilation – Roof venting should be installed at the same time as the ridge tiles. EcoStar's **EcoVent™** ridge venting is recommended for quality attic ventilation and an improved aesthetic appearance of the EcoStar roof system.

Please refer to the Majestic Slate Installation Guide for specifics of installation.

PRODUCT SPECIFICATIONS

	10" Tiles	12" Tiles
PRODUCT CHARACTERISTIC		
Length	18" (457 mm)	
Width	10" (254 mm)	12" (305 mm)
Weight	1.4 lbs. (0.64 kg)	1.6 lbs. (0.73 kg)
Thickness	¼" (6 mm)	
PACKAGING INFORMATION		
Tiles per bundle	25	
Weight per bundle	35 lbs. (15.88 kg)	40 lbs. (18.14 kg)
Tiles per pallet	1400	
Weight per pallet	1,960 lbs. (889 kg)	2,240 lbs. (1016 kg)
Linear feet per bundle	20.75 ft. (6.32 m)	25 ft. (7.62 m)
FORMULATION		
Materials	Thermoplastic Olefin	
PHYSICAL PROPERTIES (Typical)		
Operating Range	-25°F to 200°F (-32°C to 93°C)	
Tensile (D-412)	1,500 psi (10,342 kpa)	
Water Absorption (D-570)	0% by wt.	
APPLICABLE STANDARDS		
UL Listed 790 Fire Resistance	Class C	
UL 2218 Impact	Class 4	
Texas Dept. of Insurance	Listed	

WARRANTIES

EcoStar warrants this product to be free of defects in workmanship and materials at the time of shipment from EcoStar's factory. EcoStar will at its option either supply new product or refund the purchase price of any product found to be defective hereunder.

EcoStar's limited warranties are the only warranties extended by EcoStar with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. EcoStar specifically disclaims liability for any incidental, consequential, or other damages, including but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.*

The dollar value of EcoStar's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the EcoStar material in question.

*See www.ecostarllc.com for available warranties.



42 Edgewood Drive | Holland, NY 14080 | Tel: 800.211.7170 | www.ecostarllc.com

PRODUCT TECHNICAL DATA