




## Universal Hip & Ridge

### DESCRIPTION

Seneca Shake™ Hip & Ridge is a rubber and plastic-based ridge tile designed to provide the look of natural cedar shake on the ridge and hip portions of the roof. Used in conjunction with all Seneca Shake roofing tiles, Seneca Shake Hip & Ridge is manufactured with a state of the art formulation using recycled polyolefin polymers.

Seneca Shake Hip & Ridge is 12" (305 mm) wide, 18" (457 mm) long and ¼" (6 mm) thick and is available in eleven (11) standard colors.

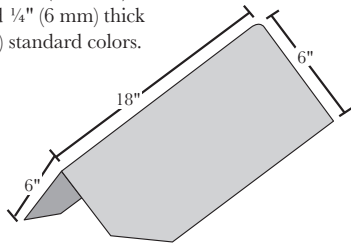

### ADVANTAGES

Seneca Shake Hip & Ridge provides the look of natural shake with these added advantages:

- High impact resistance which provides protection from hail, falling branches, foot traffic, ice and snow damage.
- Seneca Shake Hip & Ridge can be installed up to 8 times faster than natural stone slate.
- The color in Seneca Shake Hip & Ridge has been added during formulation providing for color throughout the product. As with all roofing products, natural weathering will occur.
- EcoStar provides warranties for Seneca Shake Hip & Ridge for up to 50 years.

### INSTALLATION

**Temperature** – If tiles have been stored in temperatures below 45°F (7°C), they must be restored to a temperature above 45°F (7°C) before installation. Ambient temperature should be at least 34°F (1°C) and rising.

**Substrate** – Seneca Shake should only be installed on a minimum of ½" (13 mm) plywood, minimum 7/16" (11 mm) OSB or minimum ¾" (19 mm) tongue and groove wood decking. Seneca Shake should not be applied over existing roof materials. Existing roof materials must be removed down to the deck, prior to installation.

**Exposure** – Hip & Ridge tiles are always installed with a 6" (152 mm) exposure.

**Fasteners** – Fasteners must be ring shank stainless steel.

**EcoStar Fasteners** for Hip & Ridge tiles are available in hand drive style in 2" (51 mm) and 2½" (64 mm) lengths.

**Color Variation** – All Seneca Shake Hip & Ridge tiles come with shade variation. This shade variation may occur differently from pallet to pallet. Application of the product should not begin until all material has been delivered to the project site. Because of this shade variation the applicator must take precautions to ensure that the various shades of the product are properly blended. Tiles must be taken from different pallets and bundles to ensure consistency in application. **NOTE: EcoStar will not be responsible for the improper blending and application of the product.**

Natural weathering will produce further shade variations, even in tiles appearing to be identical in color when new.

**Ventilation** – At the same time the ridge tiles are being installed, roof venting should be installed. EcoStar's **EcoVent™** ridge venting is recommended for quality attic ventilation and an improved aesthetic appearance of the EcoStar roof system.

**Please refer to the Seneca Shake Installation Guide for specifics of installation.**

### PRODUCT SPECIFICATIONS

PRODUCT CHARACTERISTIC	
Length	18" (457 mm)
Width	12" (305 mm)
Thickness	¼" (6 mm)
Weight	1.5 lbs. (0.68 kg)
Tiles per linear foot	2 at required 6" (152 mm) exposure
PACKAGING INFORMATION	
Tiles per bundle	10
Weight per bundle	15 lbs. (6.8 kg)
Bundles per pallet	100
Weight per pallet	1,500 lbs. (680 kg)
Linear feet per bundle	5 ft. (1.52 m)
FORMULATION	
Materials	Thermoplastic Olefin
PHYSICAL PROPERTIES (Typical)	
Operating Range	-25°F to 200°F (-32°C to 93°C)
Tensile (D-412)	1,500 psi (10,342 kpa)
Water Absorption (D-570)	0% by wt.

### WARRANTIES

EcoStar warrants this product to be free of defects in workmanship and materials at the time of shipment from EcoStar's factory. EcoStar will at its option either supply new product or refund the purchase price of any product found to be defective hereunder.

**EcoStar's limited warranties are the only warranties extended by EcoStar with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. EcoStar specifically disclaims liability for any incidental, consequential, or other damages, including but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.\***

The dollar value of EcoStar's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the EcoStar material in question.

\*See [www.ecostarllc.com](http://www.ecostarllc.com) for available warranties.



42 Edgewood Drive | Holland, NY 14080 | Tel: 800.211.7170 | [www.ecostarllc.com](http://www.ecostarllc.com)

05/19 © Copyright 2019 EcoStar LLC. EcoStar, Seneca Shake and EcoVent are trademarks of EcoStar LLC.  
P/N-606020 Seneca Shake Hip & Ridge PTD. This data sheet, effective 05/06/2019 supersedes all previous versions.

PRODUCT TECHNICAL DATA